

5. Industrial Tumble Dryers

UHP190, UHP250, UHP285, UHP345

Features and Benefits

- Heat pump
- Standard stainless steel drum with large diameter
- Easy-to-use microprocessor
- Combination of Radial and Axial airflow
 - Maximal heat transfer
 - Low energy consumption
 - Short drying time
- Large door opening for easy loading and unloading
- Self cleaning lint screen


Options

- Reversing drum
- FLEX - full Control programmer (FCT)
- Residual moisture control
 - Safe drying of delicate linen
 - Humidity detection in %
 - Ideal in combination with wet cleaning concept
 - Ideal for dry cleaners, fire depts
 - Available on Easy and Flex Controls
- Stainless steel front
- Automatic cleaning of bottom heat exchanger by pressurised water



TYPE		UHP190	UHP250	UHP285	UHP345
CAPACITY					
Drum capacity	kg/lb	9.5/20	12.5/25	14/30	17/35
Drum volume	litres	195	250	285	345
Drum diameter	Ø mm	760	760	760	760
DRYING AVERAGE					
	g/min	122	126	120	120
Electric heating	g/min	122	126	120	120
MOTORS					
Fan	kW	0.20	0.20	0.20	0.20
Drive	kW	0.25	0.25	0.25	0.25
HEAT PUMP					
Electrical connection		3x380-415V 50Hz + N			
Energy	kW	2.9	2.9	2.9	2.9
PROGRAMMER					
Easy control – antivandal		standard	standard	standard	standard
Full control		available	available	available	available
DIMENSIONS					
Size HxWxD	mm	1465x795x1275	1680x795x1525	1680x795x1615	1680x795x1735
TRANSPORT DATA					
Gross weight	kg	305	385	400	400
Net weight	kg	290	350	360	375
Packed HxWxD	mm	1570x880x1335	1785x855x1540	1785x855x1635	1785x855x1750

Energy consumption comparison: conventional dryer vs heat pump dryer

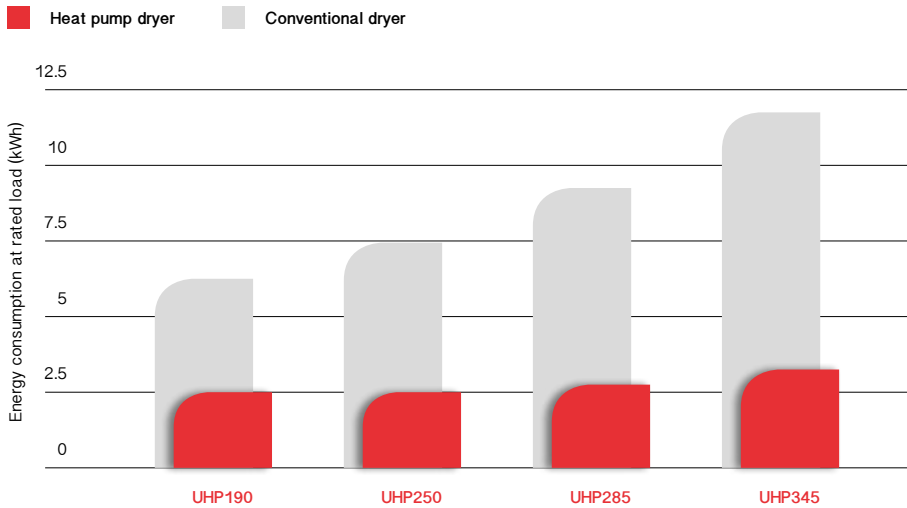

UniMac preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.