



ELITECH LINE EL991E

| | |
|--------|----------------|
| TYPE | Warewasher |
| LINE | ELITECH LINE |
| BASKET | 600x670 |
| SIZE | 1440x860x1980h |

The **EL991E** warewasher is the answer for anyone who has to effectively wash objects measuring up to 575x645x825(h)mm inside its **two baskets**, thanks to the **two wash pumps** and two rinse pumps. It is suitable for washing baking trays, pots of various kinds, mixing bowls, utensils and even 52 dishes at each cycle as it is equipped with two baskets with a maximum productivity of 60 baskets/hour (3120 dishes/hour). The work height and the **counterbalanced door** facilitate loading while the **double walls** improve thermal-acoustic insulation. The **rounded moulded tank with integral filters** ensures maximum hygiene and perfect draining.

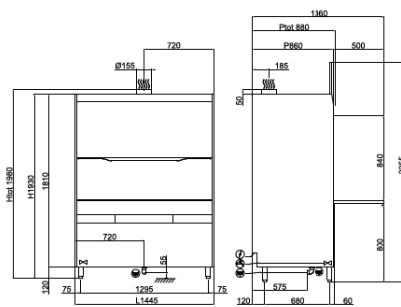

The dishwashers of the **ELITECH** line ensure maximum performance thanks to the standard Acquatech System which, through an atmospheric boiler and rinse pump, maintains **constant temperature and pressure** and optimum water consumption. Elitech ensures a sanitising rinse cycle and proves to be the perfect choice for canteens, nursing homes, pastry shops, bakers and butchers where compliance with HACCP rules is essential. For anyone seeking perfectly sparkling glasses, it is possible to connect a **Reverse Osmosis System** which purifies water and reduces detergent and rinse-aid consumption, ensuring excellent results and perfect glasses without the need for hand drying. The innovative **UNIKO tempered glass touch screen display** makes any operation simple and intuitive, from the choice of the most suitable wash cycle to its progress control, as well as constantly monitor the status of the dishwasher with ease. The large variety of wash cycles makes the dishwasher customisable according to your needs. Constant self-diagnosis allows you to minimise machine downtime, promptly warning the technician through the **Wi-Fi IKLOUD** control system that offers the possibility of remotely changing the dishwasher parameters and resolving the situation in real-time.


The electronic control allows you to manage various parameters to give you an absolute customisation level and the continuous **self-diagnosis** allows you to **minimise machine downtime**, suggesting some operations that need to be verified. The **self-cleaning cycle** at the end of the day cleans the wash tank and empties the hot water from the boiler, preventing limestone from building up inside. The standard **double peristaltic electric rinse-aid and detergent dispenser** ensures the best result from each wash cycle with great savings thanks to the precise dosage managed by the electronic card; whereas, the **moulded washing and rinsing arms** ensure great reliability and durability. The **Thermo-stop** function checks that washing and rinsing begin only when the desired temperature is reached. The bodywork is made entirely of **AISI 304** s


| DISHWASHERS FEATURES | ELITECH LINE EL991E |
|--|-----------------------------|
| Dimensions - (mm) L - P - H | 1440x860x1980h |
| n° baskets/hour - (+55°C) | Max 60 |
| Height pot max | 840mm |
| LT bread basket | 2 x 100 (H=850mm) |
| Trays | GN1/1 - 60x40 GN2/1 - 60x80 |
| Tank heating element - Tank capacity | 9,0 kW - 100lt |
| Boiler heating element - Boiler capacity | 9,0kW - 20,8lt |
| Washing pump | 2 x 2,0kW / 2 x 2,7Hp |
| Total power input / Current | 13,4kW / 32A |
| Standard input voltage | 400V3N+T 50Hz |
| Recommended inlet water temperature | +55°C |
| Water hardness | 7÷10 °f |
| Water consumption per cycle (inlet suggested pressure 2 BAR) | 4,0lt GUARANTEED |
| Adjustable detergent and rinse-aid dispenser | ELECTRIC |
| Acquatech system rinse | si |
| STANDARD EQUIPMENT | |
| 8 division cutlery insert | 2 |
| Integral tank filter | 1 + 1 |
| Inox basket dim.600x670x100mm | 2 |
| Basket for trays with 5 compartments | 2 |
| OPTION | |
| UNIKO touch display with IKLOUD Wi-Fi control | ● |
| Booster pump kit 0,5Hp | - |
| Drain pump kit 40W | ● |
| Boiler heating element 4,5kW | ● |
| Boiler heating element 5,4kW | ● |
| Reverse osmosis system | - |
| Kit 4 Stainless steel feet 50-70mm | - |

● INSTALLABLE ACCESSORY , - NOT INSTALLABLE ACCESSORY

EL991E



 400V3N+T 13,00kW
 L=1950 (6 POLES)


 G 3/4" M
 L=1200


 Ø30x40
 L=1800