



# EVOLUTION LINE EVO421

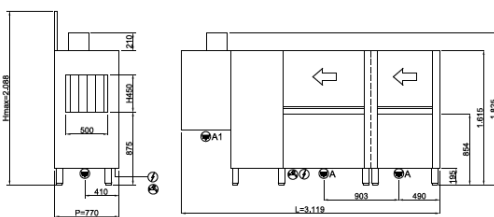
TYPE	Rack conveyor dishwashers
LINE	EVOLUTION LINE
BASKET	500x500
SIZE	3119x813x1825h




The EVOLUTION Line has been designed to meet the needs of every customer, thanks to the various accessories installable, combining large workloads and optimising spaces available, simplifying operator work and reducing consumption. The models of this line are equipped with a double filtration system that retains all residues, whereas the vertical wash pumps and stainless steel wash arms ensure great performance. Evolution is also equipped with counterbalanced doors with double wall and anti-fall system and rounded moulded tanks.

DISHWASHERS FEATURES	EVOLUTION LINE EVO421
<b>Dimensions - (mm) L - P - H</b>	3119x813x1825h
<b>Basket dimensions</b>	500x500
<b>n° baskets/hour</b>	135/200/270
<b>Passage height max (cm)</b>	450
<b>Total power input</b>	30,1 (55°C) 39,6 (15°C)*
<b>Standard input voltage</b>	400V3N+T 50 Hz
<b>PRE-WASHING</b>	
<b>Tank capacity</b>	69
<b>Tank Resistance</b>	10,5
<b>FIRST WASHING</b>	
<b>Tank capacity</b>	69
<b>Tank Resistance</b>	10,5
<b>WASHING</b>	
<b>Tank capacity</b>	69
<b>Tank Resistance</b>	10,5
<b>PRE-RINSING</b>	
<b>Tank capacity</b>	69
<b>RINSING</b>	
<b>Break-Tank and rinse pump</b>	200W
<b>Boiler heating</b>	9,5
<b>Water consumption</b>	-230
<b>Temperatura Acqua di Alimentazione</b>	+55°C
<b>Minimum water pressure</b>	1,5
<b>Water hardness</b>	7÷10 °f
<b>DRYER UNIT</b>	
<b>ventilatore</b>	0,55
<b>resistenza</b>	6,0
<b>STANDARD EQUIPMENT</b>	
<b>Basket for glasses dim.500x500x100mm</b>	1
<b>Basket for 18 dishes dim.500x500x100mm</b>	2
<b>4 division cutlery insert</b>	1
<b>OPTION</b>	
<b>Drying</b>	●
<b>Pressure reducer with pressure gauge</b>	●
<b>Corner pre-washing system</b>	●
<b>Vapour outlet chimney</b>	●
<b>Internal detergent &amp; rinse-aid dosing unit</b>	●
<b>Triple tank filter and stainless steel drawer</b>	●

● INSTALLABLE ACCESSORY , - NOT INSTALLABLE ACCESSORY

## EVO421



-  400V3N+T 30,10kW  
(CABLE NOT PROVIDED)
-  G 3/4" M  
55°C  
L=1500
-  A:Ø1"1/2 M  
A1: Ø31 M  
L=1500