



## **UA332-520**


## **FEATURES AND BENEFITS**

- Rigid mounted, normal spin, 100G factor
- Stainless steel panels
- Stainless steel drum and tub
- PROform fully programmable microprocessor
- Patented soap hopper
- High capacity water inlets
- Large drain valves (2 x Ø 76 mm)
- Easy access to all vital parts from the front
- Large door opening for easy loading & unloading

## **OPTIONS**

- USB plug (on the back panel)
- Liquid soap connection
- Steam heating version
- Liquid soap pumps
- Water recovery kit
- 3rd water inlet

ТҮРЕ		UA332	UA520				
INNERDRUM							
Capacity (1:10)	kg	35	52				
Volume	l	332	520				
Diameter	mm	914	914				
DRUM SPEED							
Wash	rpm	38	38				
Extraction	rpm	540	440				
G-Factor	G	150	100				
HEATING							
Electricity (standard)	kW	27	40,6				
Steam	bar	1-8	1-8				
Hot water	°C	90	90				
Sound pressure level	dB (A)	<65	<65				
Water valves connection	inch	3/4″	3/4″				
Water pressure	kPa	100-800	100-800				
Rec. water pressure	kPa	300-500	300-500				
Water inlet	l/min	66-188	183-518				
Drain valve	outer Ø mm	2 x 76	2 x 76				
Flow amount with drain valve	l/min	2 x 210	2 x 210				
Steam valve connection	inch	3/4"	3/4"				
Steam pressure	kPa	100-800	100-800				
TRANSPORT DATA							
Gross weight	kg	450	570				
Net weight	kg	410	520				
Packed HxWxD	mm	1625 x 1088 x 1060	1625 x 1088 x 1345				

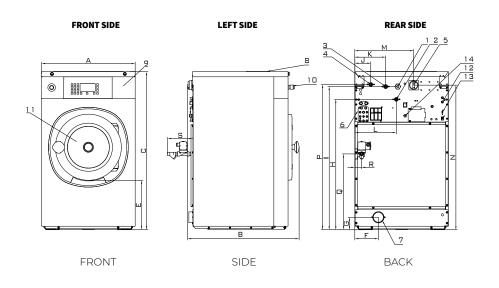

- 1. Electrical connection
- 2. Hot water
- 3. Cold water hard
- 4. Cold water soft
- 5. Main switch
- 6. Liquid soap connection
- 7. Drain
- 8. Soap dispenser
- 9. Control panel
- 10. Button CENTRAL STOP
- 11. Door opening UA80 : Ø 330 mm UA105-135: Ø 410mm
- 12. Fuses
- 13. USB port
- 14. Electrical connection to liquid soap pumps

TYPE	A	В	С	D	E	F	G	Н	ı	J	K	L	M	N	0	P	Q	S	T
UA 332	1060	1030	1500	936	465	318	120	1326	1366	113	248	383	671	1349	1413	528	66	145	482
UA 520	1060	1315	1500	1221	465	318	120	1414	1374	88	223	363	671	1349	1332	528	66	145	482
	width	depth	height																